




EuroTouch-2IN System

Mas de Garrigues - 81170 Loubers
 Tél : + 33 (0)5 63 53 92 14 - Fax : + 33 (0)5 63 53 94 25
 Administratif-fbasse@wanadoo.fr

Agence Toulouse EuroTouch-Centre Technique 2IN System

9 Chemin de Lourmet - 31180 Castelmaurou
 Ligne IP : 0877 821 335 (Tarification Locale) Tél/Fax : +33 (0)5 61 35 84 30
www.2in-system.com - contact@2in-system.com

Fiche Technique SAGP-865EVG

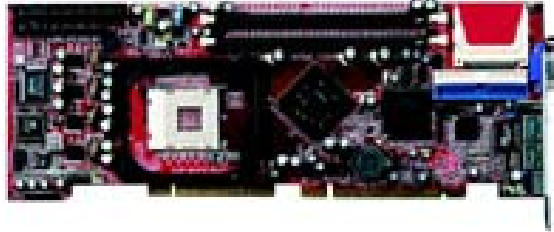

Intel Pentium 4 CPU support up to FSB 800 MHz
 PIAGP interface supports AGP 8X/4X add-on card
 Dual channel DDR400 SDRAM memory support
 LAN, SATA, USB 2.0, Audio integrated

CPU Socket	Socket-478
CPU Type	Intel P4 / Celeron supports HT Technology
FSB	400/533/800 MHz
Chipset	Intel 865G + ICH 5
Memory	Dual channel DDR333/400 SDRAM socket support up to 2GB
VGA	Intel 865G integration
AGP	AGP 4X / 8X bus
Ethernet	1x 10/100 Mbps i82562ET Ethernet 1x 10/100/1000 Mbps i82547 Ethernet by CSA
I/O Interface	2 x RS-232 serial ports 1 x PS/2 for Keyboard/Mouse 1 x LPT (SPP / EPP / ECP) 7 x USB 2.0 ports 1 x IrDA
Driver Interface	2 x IDE ATA-100/66/33 2 x SATA-150 1 x FDD
Audio	AC'97 Codec
SSD	CF Type II
Power Consumption	+12@7.5A, +5V@7A, -12V@0.5A (P4 2.0GHz FSB800 Dual channel DDR400 512MB SDRAM)
Watchdog Timer	Software programmable supports 1 ~ 255 sec system reset
Hardware Monitor	Provides CPU Vcore, Vcc, CPU/ System fan speed and temperature detecting function
Operation Environment	Temperature Range 0~60°C Relative Humidity 5~95%, non-condensing
GW	1.1kg

SAGP-865EV : PIAGP Socket-478 800MHz FSB Base CPU Board with AGP 8X, LAN, USB2.0 & Serial-ATA

SAGP-865EVG : PIAGP Socket-478 800MHz FSB Base CPU Board with AGP 8X, LAN, GbE, USB2.0 & Serial-ATA

CB-USB02 (Option) : Dual Port USB cable

PISA-KIT01 (Option) : PCI-to-ISA Bridge Module

CF-514 (Option) : High performance Skiving Pentium® 4 CPU cooler